



APV SERIES DATASHEET

Application Delivery Controllers

APV Series application delivery controllers optimize the availability, performance and security of cloud services and enterprise applications while reducing cost and complexity in the data center.

Powered by Array's 64-bit SpeedCore® architecture, APV Series application delivery controllers (ADCs) cost-effectively drive industry-leading performance across a robust set of availability, acceleration and security features to deliver unmatched overall value. Available as high-performance appliances that feature the latest in hardware acceleration and energy-efficient components or as agile virtual appliances that enable flexible pay-as-you-go business models, APV Series ADCs are engineered to boost application performance in modern data center, cloud and virtual environments and speed ROI for service provider, enterprise and public sector organizations.

Highlights & Benefits



- Dedicated appliances from 3.5 Gbps to 140 Gbps and virtual appliances with support for one to eight vCPUs to scale-up and scale-out as needed; also available on popular public cloud marketplaces such as AWS and Azure
- Integrated Layer-4 and Layer-7 server load balancing, link load balancing, global server load balancing, connection multiplexing, SSL acceleration, SSL intercept, caching, compression, traffic shaping, DDoS protection, IPv6 and Web application security
- High-performance, kernel-level Layer-7 policy engine for enabling customizable application traffic management without impacting performance or scalability
- Industry-leading performance and \$/SSL TPS for 2048-bit SSL with advanced client certificate handling for secure application support and easy application integration
- Multi-level security including a hardened OS, reverse-proxy architecture and kernel-level Web firewall for guarding applications without impacting performance
- Delivers 99.999% application availability, up to 5x application acceleration and provides a first line of defense for Web-enabled applications and cloud services
- Offloads SSL processing from Web and application servers for increased efficiency, capacity and return on investment (ROI)
- Intercepts and decrypts/re-encrypts SSL traffic for 3rd-party security appliances
- Intelligently load balances traffic across optimal WAN links to reduce costs and improve the performance of business-critical applications
- Application-specific certifications, guides and policies for rapid deployment and accelerated delivery of business-critical enterprise applications
- ePolicy™ L7 application scripting and eRoute™ L4 routing for custom control of application traffic
- IPv6 gold certified for IPv4 preservation, IPv4/6 translation and IPv6 migration
- Array eCloud™ RESTful API and XML-RPC for seamless interaction with cloud management systems and 3rd party monitoring solutions
- Integration with VMware vRealize Orchestrator and Microsoft System Center, as well as OpenStack load balancing-as-a-service (LBaaS)
- N+1 clustering for up to 32 hardware or virtual instances, single system image and stateful TCP failover for industry-leading availability and scalability
- Space-efficient, redundant-power hardware appliances that consume 10-35% less power versus alternative solutions
- Familiar CLI, intuitive cloud-friendly WebUI and centralized management for ease of use and configuration

Server Load Balancing

APV Series application delivery controllers ensure 99.999% availability for cloud services and enterprise applications. Leveraging robust distribution algorithms, health check mechanisms, clustering and failover capabilities, APV Series appliances maintain connections, ensure persistence, direct traffic away from failed servers and intelligently distribute application services across multiple servers for optimized performance and availability. APV Series can load balance traffic for a wide variety of protocols at Layers 2, 3, 4 and 7, including WebSocket.

Layer-7 Policy Engine

Customized traffic management is often a trade-off between performance, control and ease-of-use. Unlike ADCs that rely on complex, compute-intensive scripting to enable custom Layer-7 policies, Array supports a vast library of policies that are hard-coded at the kernel level, are configurable with point-and-click simplicity via the WebUI or CLI, and can be combined and nested to create advanced customized application traffic management. With Array's unique approach to Layer-7 traffic management, customers get the best of all worlds: ease of use, granular control and superior performance and scalability.

2048-Bit SSL Offloading

SSL offloading reduces the number of servers required for secure applications, improves server efficiency and dramatically improves application performance.

Offloading compute-intensive key exchange and bulk encryption, and delivering industry-leading client-certificate performance, SSL acceleration is ideal for scaling secure SaaS services, e-commerce environments and business-critical applications requiring high-volume secure connectivity.

Although more secure than the old 1024-bit standard, 2048-bit keys are five times more compute intensive and can impact both performance and the cost of supporting applications. Array 2048 and 4096-bit SSL encryption offers unbeatable scalability and performance with the lowest cost per SSL TPS to offset

transition costs and improve security without impacting performance.

SSL Intercept

SSL-encrypted data traffic is increasing rapidly, which can place data centers and enterprises at risk – in many cases, encrypted traffic cannot be inspected by security appliances such as firewalls, IDS/IPS, data loss prevention and deep packet inspection, thus bypassing these important security measures.

Array's SSL Intercept capability decrypts SSL traffic, allowing 3rd-party appliances to inspect them fully, then re-encrypts before forwarding the traffic to its destination. Flexible deployment options include L2 or L3 mode, integrated or distributed mode, forward or reverse proxy, and load balancing across multiple 3rd-party security appliances. In addition, an APV Series ADC can operate as a Webagent service to implement explicit forward proxy mode.

WebWall Web Application Firewall and DDoS Protection

With WebWall®, Array's suite of Web application security capabilities, APV Series application delivery controllers can protect against distributed denial of service (DoS/DDoS) and malformed URL attacks and allow a wide range of Layer 2 through Layer 7 protective policies to be stacked atop one another for increased security.

APV appliances are security-hardened to protect applications and servers from L4 and L7 DDoS attacks and support content filtering to guard against protocol and application DDoS attacks as well as Syn-flood, tear drop, ping-of-death, Nimda, Smurf and other malicious attacks. APV appliances also feature extensive access control lists, network address translation and stateful packet flow inspection – all executed at the kernel level – to guard against attacks and unauthorized access without impacting performance or scalability.

In addition, integrated Web application firewall capabilities provide deep application data inspection – beyond IP and TCP headers – to deal with attacks such as SQL injection and cross-site scripting. Deployable

in front of multiple Web or application servers, Array's Web application firewall detects and responds to signatures for known application vulnerabilities and is programmable to deal with future threats.

Link Load Balancing & GSLB

Link load balancing (LLB) and global server load balancing (GSLB) ensure 99.999% availability for wide area network (WAN) connections and geographically dispersed sites and hybrid cloud environments. Link load balancing with end-to-end health monitoring and dynamic routing detects outages and monitors performance in real time to distribute traffic across multiple WAN connections for a premium, always-on end-user experience. Ideal for geographically distributed applications, multi-site architectures and hybrid cloud applications, global server load balancing directs traffic away from failed data centers or cloud services and intelligently distributes services between sites based on proximity, language, capacity, load and response times for maximum performance and availability.

Application Acceleration

APV Series appliances leverage multiple acceleration technologies and optimizations to deliver a premium end-user experience for a wide range of applications and data services. In-memory caching increases server efficiency and improves seek and response times by over 500%, hardware or software compression can reduce bandwidth utilization and end-user response times by more than half and TCP connection multiplexing aggregates millions of short-lived client connections into persistent fast lanes that increase server efficiency by up to 70% while improving application performance.

ePolicy L7 Application Scripting

Where Array's Layer-7 policy engine cannot meet application traffic management requirements, ePolicy scripting allows transactions and content to be manipulated to achieve traffic distribution that improves data center efficiency and mitigates the effect of delivering applications over the Internet.

eRoute L4 Routing

Using eRoute, inbound and outbound WAN traffic may be load balanced across multiple ISP links based on preset and user-defined algorithms and directed across routes optimized for maximum stability and performance. Additional L4 traffic management features include VLANs, port forwarding, port and link redundancy and the ability to bundle multiple low-cost links to improve bandwidth utilization and reduce costs.

Application-Specific Certifications

In conjunction with ISVs and application developer partners, Array APV Series appliances have been certified to provide load balancing, acceleration and security for enterprise applications such as Microsoft Lync 2010 and 2013, Microsoft Exchange 2010/2013/2016, SAP, Oracle, eClinicalWorks and others. Leveraging deployment guides, businesses can take the guesswork out of application delivery. Following simple step by step instructions, IT can rapidly and confidently configure APV appliances for optimized delivery of business critical applications.

Traffic Shaping & QoS

Traffic shaping optimizes application traffic on WAN links to improve bandwidth utilization and end-user response times. Supporting user-defined policies, APV Series appliances prevent bandwidth-intensive applications from over-utilizing WAN links and ensure essential applications are prioritized to meet service level agreements. Used in conjunction with link load balancing, global server load balancing and QoS features such as filters and class-based queuing, traffic shaping can dramatically improve application performance.

IPv6 Support

For organizations needing an IPv6 Web presence, server load balancing protocol translation (SLB-PT) transforms existing IPv4 Web sites into IPv6 compatible sites and greatly reduces the need for duplicate equipment, content and management. Where there is a need to make the most of depleted IPv4 resources,

NAT and dual NAT (dual-stack IPv6) allow multiple clients to utilize a single IPv4 address. In migration environments, Array IPv6 solutions support both NAT64 and DNS64 to enable IPv6 clients to connect with IPv4 servers and content. To ensure a consistent application experience across IPv4 and IPv6 clients and networks – and to enable fully-capable, next-generation solutions – IPv6 feature parity is supported for all Array APV Series application delivery controllers.

Management & Integration

APV Series application delivery controllers are simple to install and offer intuitive configuration and management via a cloud-friendly, intuitive WebUI and a familiar command line interface. Using the administration tool kit, network managers can view the status for a wide range of system parameters, enable services on the fly and automate configuration using XML-RPC or RESTful API. Leveraging extensible APIs, application and network intelligence can be integrated with third-party and cloud monitoring and management or exported for optimizing complementary data center systems. In addition, APV Series appliances support VMware vRealize Orchestrator and Microsoft System Center integration for intelligent command and control of virtualized application infrastructure.

eCloud API & OpenStack Integration

To meet the deployment and management requirements of load balancing and application delivery in the cloud, Array's eCloud API provides a script-level interface for cloud management systems to manage and monitor Array devices and assist in interactions between cloud operating systems and virtual machines running Array load balancing. For cloud providers and enterprises leveraging the OpenStack architecture for cloud management and automation, Array's integration with OpenStack load balancing-as-a-service (LBaaS) creates a standardized means to rapidly integrate with and control Array technology.

Product Editions

APV Series hardware appliances support two product editions. AppVelocity supports a rich server load balancing and application acceleration feature set optimized for local traffic management. AppVelocity-S combines SSL acceleration with server load balancing and application acceleration to create a traffic management solution ideal for SaaS, ecommerce environments and applications requiring a high degree of secure connectivity. Both AppVelocity and AppVelocity-S product editions include link load balancing and support global server load balancing as an option. vAPV virtual appliances include all features and software modules found on Array's APV Series application delivery controller dedicated appliances.

Physical & Virtual Appliances

Dedicated APV appliances leverage a multi-core architecture, SSDs, software or hardware SSL and compression, energy-efficient components and 10 GigE to create solutions purpose-built for scalable traffic management. The APV6600FIPS model offers FIPS 140-2 Level 2 compliance for organizations that require a higher level of security.

Whether running on Array's AVX Series Network Functions Platform, on common hypervisors or on many popular public cloud marketplaces, vAPV virtual appliances are ideal for organizations seeking to benefit from the flexibility of virtual environments, offer infrastructure services and new elastic business models or evaluate Array application delivery with minimal risk and up-front cost.

Availability

Layer 2-7 Policy & Group Management

Multi-level virtual service policy routing – Static, default and backup policies and groups – Layer 2-7 application routing policies – Layer 2-7 server persistence – Application load balancing based on round robin, weighted round robin, least connections, shortest response, SNMP, QoS DNSdomain and DNS security extensions

Layer 2-3 Load Balancing

IP/MAC based load balancing for any IP protocol – Round robin, persistent IP and return to sender – Firewall, IPS/IDS, anti-spam, anti-virus and composite applications – L2 bridging support

Layer 4 Load Balancing

TCP, TCPS and UDP protocols – Round robin, weighted round robin, least connections and shortest response – Persistent IP, hash IP, consistent hash IP, persistent IP + port and port range – All single port TCP applications, RADIUS and DNS server support – Composite IP application support

Layer 7 Load Balancing

HTTP, HTTPS, DNS, FTP, RDP, RTSP, SIP-TCP, SIP-UDP, RTSP, Radauth, Radacct, Diameter, and WebSocket – L7 content switching (QoS network and client port - SSL and SIP session ID - HTTP URL, host name, cookie and any header - hash header, cookie and query) – URL redirect and HTTP request/response rewrite – HTTP request filter – DDoS protection

Server Persistence

Source + destination IP, Client IP, SSLID, HTTP header, URL, cookie, application – Individual session control

Content Routing & Switching

One arm, configurable reverse or transparent proxy mode per VIP – Configurable reverse or transparent proxy mode, triangle mode – Nested L7 and L4 policies – Combine L7 and L4 policies

**Global Server
Load Balancing**

Application availability from multiple locations worldwide – DNS DoS protection – DNSSEC man-in-the-middle protection – Global site/service selection – Proximity and IP persistence – Load balancing between multi-site SSL VPN deployments – SNMP pool

Link Load Balancing

Outbound: round robin, weighted round robin, shortest response time, target proximity/dynamic detection – Inbound: round robin, weighted round robin, target proximity/dynamic detection – Integrated DNS – Outbound DNS proxy

**ePolicy L7
Application Scripting**

Customize SLB policies and collaborate with SLB methods to realize load balancing among real services – Analyze packet contents of HTTP, simple object access protocol (SOAP), extensible markup language (XML) and diameter protocols – Receive, send, analyze, and discard generic TCP and TCPS packets – Perform pattern matching for text data – Control TCP connections – Monitor and take statistics of traffic

eRoute L4 Routing

Policy-based routing based on port, source/destination IP, UDP protocols, TCP – RIPv1, RIPv2 and OSPF support – Return to sender (RTS)/IP flow persistence – Port forwarding, link aggregation and port redundancy – Transparent to VPN remote access

**Application, Server &
Link Health Checks**

ARP, ICMP, TCP, HTTP/HTTPS, DNS, Radius, MySQL, MsSQL, RTSP, SIP single port/protocol health checks – Multi-port health checks – Health checks by protocol and content verification – Link health checks based on physical port, ICMP and user-defined L4 – Next gateway health checks, destination path health checks – Ensure availability and performance of applications over WAN links from a single point of management – Scriptable customer-defined composite health checks

Clustering

Up to 32 nodes – Active/active, active/standby – Configuration synchronization – Application-specific VIP health checks – Stateful TCP failover – Fast failover via USB ports – Automatic ISP failover

Single System Image	Create a single VIP (single ADC instance) out of any number of dedicated, virtualized or virtual APV appliances – Enable ultimate flexibility in scaling out
----------------------------	--

IPv6	Full IPv6 support – DNS64 & NAT64 – Dual Stack Lite – IPv6 to IPv4 and IPv4 to IPv6 NAT and full IPv6 addressing – IPv6-ready gold certified
-------------	--

Networking	Link aggregation, VLAN/MNET, NTP – Static and port-based NAT, advanced NAT for transparent use of multiple WAN links
-------------------	--

Acceleration

Application Performance	Dynamic detect – Client connection persistence – Connection multiplexing – TCP buffering – IEEE 802.3ad link aggregation
--------------------------------	--

SSL Acceleration (2048 & 4096-bit)	Hardware SSL processing – SSLv3 and TLSv1 – 4096-bit maximum cipher key size (RSA or ECC) – End-to-end security (Server-side SSL communication) – SSL session reuse and timeout control – Cipher strength reduction – Customizable cipher suite order – Customizable SSL error pages – Sharable to multiple SLB services – SSL selfcheck – Server name indication (SNI)
---	---

Compression	Hardware or software accelerated – Virtualized compression – Inline HTTP processing – Compresses HTML, XML, Java scripts and CSS – Compresses Microsoft file formats (DOC, XLS, PPT) and PDF
--------------------	--

Caching	Virtualized, memory-based cache – HTTP 1.1 compliant, policy-based cache
----------------	--

Traffic Shaping	Guarantees application performance – Rate shaping for setting user-defined rate limits on critical applications – QoS for traffic prioritization – Supports CBQs and borrow and unborrow bandwidth from queues – Advanced ACL (SLB QoS) – Supports QoS filters based on ports and protocols including TCP, UDP and ICMP
------------------------	---

Security

WebWall Web Application Security

Hardened OS – Secure access only, access control based on client certificate information and access method – Customer configurable SSL/TLS version, cipher suite and minimum cipher strength – Tamper-proof key and certificate protection – WebWall stateful packet-inspection firewall – Over 1000 ACL rules without performance degradation – Proxy-based firewall – TCP syn-flood protection – Flash and surge event protection – DoS protection – HTTP access method control – URL filtering – HTTP/DNS cache for mitigating DDoS – Web Application Firewall – Deep application data inspection for dealing with attacks such as SQL injection and cross-site scripting – Detects and responds to known application vulnerabilities – Programmable to deal with future threats

DDoS Protection (SLB)

Protection and Logging: Protocol Attack: SSL invalid packet, SSL handshake attack, SSL renegotiation, HTTP invalid packet attack – Application Attacks: HTTP slow attack, HTTP flood attack, long form submission, Challenge Collapsar (CC), Hashdos, DNS NXDomain flood – Network Attacks: SYN flood, ICMP flood, Ping of Death, Smurf, IP option – HTTP & DNS ACL rules, ACL blacklist – Monitoring and Logging: PUSH/ACK flood, FIN/RST flood, Connection flood, UDP flood

SSL Intercept

L2 or L3 mode, integrated or distributed mode, forward or reverse proxy mode – Webagent service

Client-Server Certificate Management

CSR and private key generation – Self-signed certificate support – Import certificate and private key – Import certificate format – Extensive certificate support – Certificate backup and restore – Wildcard certificate support – Server Name Indication (SNI)

Client Certificate Authentication & Authorization

Turbo client certificate verification – Root and intermediate CA import – Basic client certificate verification – Certificate chain support – Certificate revocation list (HTTP, FTP, LDAP) – Online certificate status protocol (OCSP, HTTP/HTTPS) – Certificate-based access control – Inside SSL server, two-way certificates

Client Certificate Application Integration

Parse client certificate field information with different language/encoding – Pass individual field/group and field/customer format to back-end applications – HTTP header, URL and cookie – Integrated with proxy rewrite – Detailed SSL statistics

Management


System

Centralized cluster management – Secure CLI, WebUI and SSH remote management – XML-RPC for integration with 3rd party management and monitoring – SNMP V2/V3 and private MIBs – Syslog (UDP or TCP) – Administrator and operator account management – E-mail, paging and alerting capability – Multiple configuration files and unit configuration synchronization – Online troubleshooting – Real-time monitoring – Role-based administration control – HTTP/2 support

eCloud API

Interface for cloud management systems to control and monitor hardware and virtual APV appliances – Assists interaction between components such as virtual machines in CloudOS environments – Remote management of APV appliances – Notification of events on APV appliances – eCloud demo integrated on APV appliance – Supports integration with OpenStack Load Balancing-as-a-Service(LBaaS), VMware Cloud Orchestrator (vCO) and Microsoft System Center standards

Array Application Delivery Architecture

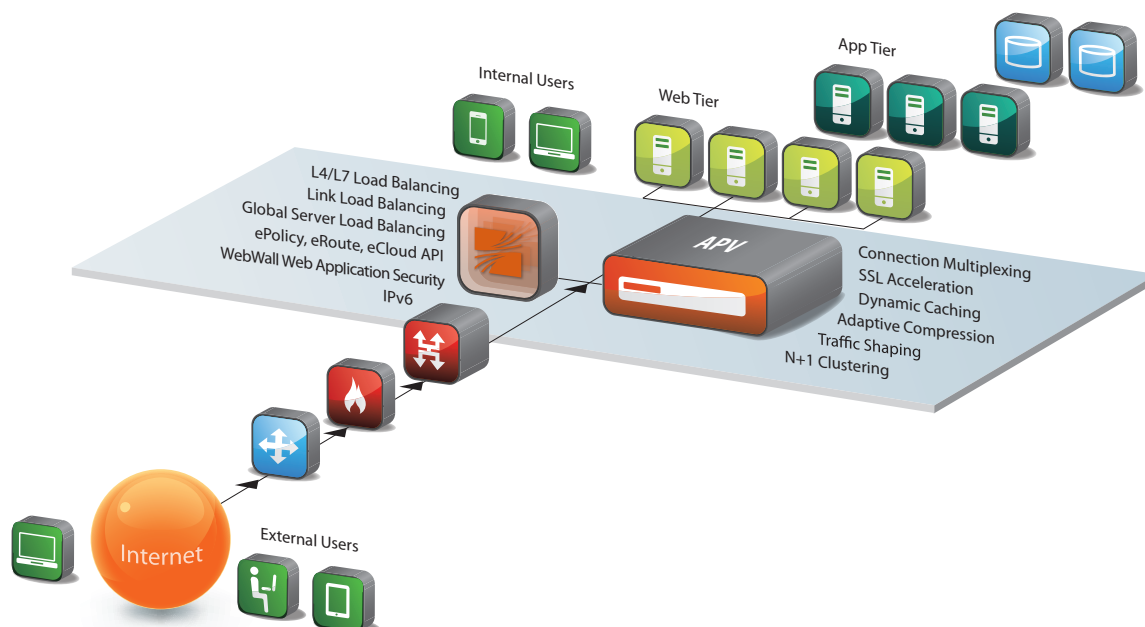

Product Specifications

• STANDARD ○ OPTIONAL

	AppVelocity		AppVelocity-S	
	APV 1600 v5/ 2600 v5	APV 3600 v5/ 6600FIPS/ 7600/11600	APV 1600 v5/ 2600 v5	APV 3600 v5/ 6600FIPS/ 7600/11600
L2, L4 & L7 SLB	•	•	•	•
LLB	•	•	•	•
GSLB	○	○	○	○
L7 Policy Engine	•	•	•	•
ePolicy Scripting	•	•	•	•
eRoute Routing	•	•	•	•
Transparent Proxy	•	•	•	•
SSL (SW)	•	•		
SSL (HW)			•	•
Compression (SW)	•	•	•	•
Compression (HW)				•
RAM Caching	•	•	•	•
Traffic Shaping	•	•	•	•
Web Application Security (Including WAF)	•	•	•	•
IPv6 Support	•	•	•	•
Multi-language WebUI	•	•	•	•
Single System Image	•	•	•	•
Fast Failover	•	•	•	•
Clustering	•	•	•	•
eCloud API & LBaaS Integration	•	•	•	•

	APV1600 v5	APV2600 v5	APV3600 v5	APV6600FIPS	APV7600	APV11600
Max. L4 Throughput	3.5 Gbps	20 Gbps	35 Gbps	35 Gbps	80 Gbps	140 Gbps
Max. SSL TPS (2048)	2K	5.5K	35K	9K	70K	70K
Max. SSL Throughput	1.5 Gbps	5 Gbps	15 Gbps	2 Gbps	45 Gbps	50 Gbps
1 GbE Copper	•	•	•	•	○	
1 GbE Fiber		○	•	○		
10 GbE Fiber		○	•	•	•	•
Power Supply	APV1600 v5, 2600 v5			Single Power: 100-240VAC, 8-4A, 50-60Hz		
	APV2600 v5			Dual Power: 100-240VAC, 8-4A, 50-60Hz		
	APV3600 v5			Dual Power: 100-240VAC, 5-3A, 50-60Hz		
	APV6600FIPS, 7600, 11600			Dual Power: 100-240VAC, 10-5A, 50-60Hz		
Dimensions	APV1600 v5, 2600 v5			Single Power: 1U – 17" W x 15" D x 1.75" H		
	APV2600 v5, 3600 v5			Dual Power: 1U – 17" W x 19.875" D x 1.75" H		
	APV6600FIPS, 7600, 11600			Dual Power: 2U – 17" W x 22.5" D x 3.5" H		
Weight	APV1600 v5, 2600 v5			Single Power: 13.6 lbs.		
	APV2600 v5			Dual Power: 17.2 lbs.		
	APV3600 v5			Dual Power: 19.8 lbs.		
	APV6600FIPS, 7600, 11600			Dual Power: 28 lbs.		
Environmental	Operating Temperature: 0° to 45°C, Humidity: 0% to 90%, Non condensing					
Regulatory Compliance	ICES-003, EN 55024, CISPR 22, AS/NZS 3548, FCC, 47FR part 15 Class A, VCCI-A. APV6600FIPS only: FIPS140-2 Level 2					
Safety	CSA, C/US, CE, IEC 60950-1, CSA 60950-1, EN 60950-1					
Support	Gold, Silver and Bronze Level Support Plans					
Warranty	1 Year Hardware, 90 Days Software					

	Supported Hypervisors (64-bit only)	Virtual Machine Requirements
vAPV <i>With the exception of hardware SSL acceleration, vAPV virtual application delivery controllers support all APV features.</i>	VMware ESXi 4.1 or Later XenServer 5.6 or Later OpenXen 4.0 or Later KVM 1.1.1-1.8.1 or later Hyper-V (Windows Server 2012) Array AVX Series	Supports 1 to 8 Virtual CPUs Requires Minimum: 4 Virtual Network Adapters 2GB RAM 40GB Disk

Ordering Information

Ordering No.	Description
APV1600	
AW977200	APV1600 AppVelocity ADC (SLB, LLB, 4x1GbE copper ports, 1U)
AW977201	APV1600 AppVelocity-S ADC (SLB, LLB, 4x1GbE copper ports, 10,000 SSL TPS 1K Keys or 2000 SSL TPS 2K Keys, 1U)
AW977205	APV1600T AppVelocity ADC (SLB, LLB, 4x1GbE copper ports, 1U)
AW977206	APV1600T AppVelocity-S (4GB, 4x1GbE copper ports, 10,000 SSL TPS 1K Keys or 2,000 SSL TPS 2K Keys, 1U)
AW920540	Upgrade from APV1600 AppVelocity to APV1600 Turbo AppVelocity - Field upgradeable
AW920541	Upgrade from APV1600 AppVelocity-S to APV1600 Turbo AppVelocity-S - Field upgradeable
AW955000	APV1600V5 AppVelocity ADC (SLB, LLB, 4x1GbE copper ports, 1U)
AW955001	APV1600V5 AppVelocity-S ADC (SLB, LLB, 4x1GbE copper ports, 2000 SSL TPS 2K Keys, 1U)
APV2600	
AW960001	APV2600 AppVelocity ADC (SLB, LLB, 4x1GbE copper ports, 1U)
AW960002	APV2600-S1 AppVelocity-S ADC (SLB, LLB, 4x1GbE copper ports, 14,000 SSL TPS 1K Keys or 2,800 SSL TPS 2K Keys, 1U)
AW960003	APV2600 AppVelocity ADC (SLB, LLB, 8x1GbE copper ports, 1U)
AW960004	APV2600-S1 AppVelocity-S ADC (SLB, LLB, 8x1GbE copper ports, 14,000 SSL TPS 1K Keys or 2,800 SSL TPS 2K Keys, 1U)
AW960005	APV2600-S2 AppVelocity-S TPS Boost ADC (SLB, LLB, 8x1GbE copper ports, 25,000 SSL TPS 1K Keys or 5,000 SSL TPS 2K Keys, 1U)
AW960006	APV2600 AppVelocity ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 1U)
AW960007	APV2600-S1 AppVelocity-S TPS ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 14,000 SSL TPS 1K Keys or 2,800 SSL TPS 2K Keys, 1U)
AW960008	APV2600-S2 AppVelocity-S TPS Boost ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 25,000 SSL TPS 1K Keys or 5,000 SSL TPS 2K Keys, 1U)
AW960009	APV2600T AppVelocity ADC (SLB, LLB, 4x1GbE copper ports, 2x10GbE SFP+ ports, 1U)
AW960010	APV2600T-S1 AppVelocity-S TPS ADC (SLB, LLB, 4x1GbE copper ports, 2x10GbE SFP+ ports, 14,000 SSL TPS 1K Keys or 2,800 SSL TPS 2K Keys, 1U)
AW960011	APV2600T-S2 AppVelocity-S TPS Boost ADC (SLB, LLB, 4x1GbE copper ports, 2x10GbE SFP+ ports, 25,000 SSL TPS 1K Keys or 5,000 SSL TPS 2K Keys, 1U)

Ordering No.	Description
AW960012	APV2600T AppVelocity ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2x10GbE SFP+ ports, 1U)
AW960013	APV2600T-S1 AppVelocity-S TPS ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2x10GbE SFP+ ports, 14,000 SSL TPS 1K Keys or 2,800 SSL TPS 2K Keys, 1U)
AW960014	APV2600T-S2 AppVelocity-S TPS Boost ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2x10GbE SFP+ ports, 25,000 SSL TPS 1K Keys or 5,000 SSL TPS 2K Keys, 1U)
AW955010	APV 2600V5 AppVelocity ADC (SLB, LLB, 4x1GbE copper ports, 1U)
AW955011	APV 2600V5 AppVelocity-S ADC (SLB, LLB, 4x1GbE copper ports, 2,800 SSL TPS 2K Keys, 1U)
AW955012	APV 2600V5 AppVelocity ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 1U)
AW955013	APV 2600V5 AppVelocity-S ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2,800 SSL TPS 2K Keys, 1U)
AW955015	APV 2600V5 AppVelocity ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 1U)
AW955016	APV 2600V5 AppVelocity-S ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2,800 SSL TPS 2K Keys, 1U)
AW955017	APV 2600V5 AppVelocity-S TPS Boost ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 5,500 SSL TPS 2K Keys, 1U)
AW955018	APV 2600V5 AppVelocity ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2x10GbE SFP+ ports, 1U)
AW955019	APV 2600V5 AppVelocity-S ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2x10GbE SFP+ ports, 2,800 SSL TPS 2K Keys, 1U)
AW955020	APV 2600V5 AppVelocity-S TPS Boost ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2x10GbE SFP+ ports, 5,500 SSL TPS 2K Keys, 1U)
APV2600 - Dual Power Supplies	
AW960015	APV2600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 1U)
AW960016	APV2600-S1 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 14,000 SSL TPS 1K Keys or 2,800 SSL TPS 2K Keys, 1U)
AW960017	APV2600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 1U)
AW960018	APV2600-S1 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 14,000 SSL TPS 1K Keys or 2,800 SSL TPS 2K Keys, 1U)

Ordering No.	Description
AWg60019	APV2600-S2 AppVelocity-S TPS Boost Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 1U, 25,000 SSL TPS 1K Keys or 5,000 SSL TPS 2K Keys)
AWg60020	APV2600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 1U)
AWg60021	APV2600-S1 AppVelocity-S TPS Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 14,000 SSL TPS 1K Keys or 2,800 SSL TPS 2K Keys, 1U)
AWg60022	APV2600-S2 AppVelocity-S TPS Boost Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 25,000 SSL TPS 1K Keys or 5,000 SSL TPS 2K Keys, 1U)
AWg60023	APV2600T AppVelocity Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP+ ports, 1U)
AWg60024	APV2600T-S1 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP+ ports, 14,000 SSL TPS 1K Keys or 2,800 SSL TPS 2K Keys, 1U)
AWg60025	APV2600T-S2 AppVelocity-S TPS Boost Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP+ ports, 25,000 SSL TPS 1K Keys or 5,000 SSL TPS 2K Keys, 1U)
AWg60026	APV2600T AppVelocity Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2x1GbE SFP+ ports, 1U)
AWg60027	APV2600T-S1 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2x1GbE SFP+ ports, 14,000 SSL TPS 1K Keys or 2,800 SSL TPS 2K Keys, 1U)
AWg60028	APV2600T-S2 AppVelocity-S TPS Boost Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2x1GbE SFP+ ports, 25,000 SSL TPS 1K Keys or 5,000 SSL TPS 2K Keys, 1U)
AW955030	APV 2600V5 AppVelocity Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 1U)
AW955031	APV 2600V5 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 2,800 SSL TPS 2K Keys, 1U)
AW955032	APV 2600V5 AppVelocity Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 1U)
AW955033	APV 2600V5 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2,800 SSL TPS 2K Keys, 1U)
AW955035	APV 2600V5 AppVelocity Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 1U)
AW955036	APV 2600V5 AppVelocity-S TPS Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2,800 SSL TPS 2K Keys, 1U)
AW955037	APV 2600V5 AppVelocity-S TPS Boost Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 5,500 SSL TPS 2K Keys, 1U)

Ordering No.	Description
AW955038	APV 2600V5 AppVelocity Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2x1GbE SFP+ ports, 1U)
AW955039	APV 2600V5 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2x1GbE SFP+ ports, 2,800 SSL TPS 2K Keys, 1U)
AW955040	APV 2600V5 AppVelocity-S TPS Boost Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 2x1GbE SFP ports (SX Fiber incl.), 2x1GbE SFP+ ports, 5,500 SSL TPS 2K Keys, 1U)
APV3600/3650 - Dual Power Supplies	
AW977880	APV3600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 4x1GbE SFP ports (SX Fiber incl.), 2x1GbE SFP+ ports, 1U)
AW977881	APV3600 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 4x1GbE SFP ports (SX Fiber incl.), 2x1GbE SFP+ ports, 25,000 TPS 2K Keys, 1U)
AW955050	APV3600V5 AppVelocity Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 4x1GbE SFP+ ports, 1U)
AW955051	APV3600V5 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 4x1GbE copper ports, 4x1GbE SFP+ ports, 35,000 TPS 2K Keys, 1U)
AW977882	APV3650 AppVelocity Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 4x1GbE SFP ports (SX Fiber incl.), 2x1GbE SFP+ ports, 1U)
AW977883	APV3650 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 4x1GbE SFP ports (SX Fiber incl.), 2x1GbE SFP+ ports, 25,000 SSL TPS 2K Keys, 1U)
APV 1U Appliances: Feature Options	
AW920610	APV1600T/TM8.x Feature Option: Global Server Load Balancing License
AW920620	APV2600/3600/3650 Feature Option: Global Server Load Balancing License
APV5600	
AW960030	APV5600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP+ ports, 2U)
AW960031	APV5600 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 2x1GbE SFP+ ports, 80,000 SSL TPS 1K Keys or 25,000 SSL TPS 2K Keys, 2U)
AW960032	APV5600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 4x1GbE SFP ports (SX Fiber incl.), 2x1GbE SFP+ ports, 2U)
AW960033	APV5600 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 4x1GbE SFP ports (SX Fiber incl.), 2x1GbE SFP+ ports, 80,000 SSL TPS 1K Keys or 25,000 SSL TPS 2K Keys, 2U)
APV6600	
AW960040	APV6600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 16x1GbE copper ports, 2x1GbE SFP+ ports, 2U)

Ordering No.	Description
AWg60041	APV6600 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 16x1GbE copper ports, 2x10GbE SFP+ ports, 80,000 SSL TPS 1K Keys or 25,000 SSL TPS 2K Keys, 2U)
AWg60042	APV6600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 16x1GbE copper ports, 4x1GbE SFP ports (SX Fiber incl.), 2x10GbE SFP+ ports, 2U)
AWg60043	APV6600 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 16x1GbE copper ports, 4x1GbE SFP ports (SX Fiber incl.), 2x10GbE SFP+ ports, 80,000 SSL TPS 1K Keys or 25,000 SSL TPS 2K Keys, 2U)
AWg60044	APV6600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 16x1GbE copper ports, 4x10GbE SFP+ ports, 2U)
AWg60045	APV6600 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 16x1GbE copper ports, 4x10GbE SFP+ ports, 80,000 SSL TPS 1K Keys or 25,000 SSL TPS 2K Keys, 2U)
AWg60046	APV6600 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 4x10GbE SFP+ ports, 25,000 SSL TPS 2K Keys, 2U)
APV6600 FIPS	
AWg60049	APV6600 AppVelocity-FIPS Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 2x10GbE SFP+ ports, 9,000 SSL TPS 2K Keys, 2U)
AWg60048	APV6600 AppVelocity-FIPS Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 4x10GbE SFP+ ports, 9,000 SSL TPS 2K Keys, 2U)
APV7600	
AWg77980	APV7600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 8x10GbE SFP+ ports, 2U)
AWg77981	APV7600 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 8x10GbE SFP+ ports, 35,000 SSL TPS 2K Keys, 2U)
AWg77982	APV7600 AppVelocity-S Turbo Dual Power Supplies ADC (SLB, LLB, 8x10GbE SFP+ ports, 70,000 SSL TPS 2K Keys, 2U)
AWg77983	APV7600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 16x10GbE SFP+ ports, 2U)
AWg77984	APV7600 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 16x10GbE SFP+ ports, 35,000 SSL TPS 2K Keys, 2U)
AWg77985	APV7600 AppVelocity-S Turbo Dual Power Supplies ADC (SLB, LLB, 16x10GbE SFP+ ports, 70,000 SSL TPS 2K Keys, 2U)
AWg77986	APV7600 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 4x10GbE SFP+ ports, 35,000 SSL TPS 2K Keys, 2U)
AWg77987	APV7600 AppVelocity-S Turbo Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 4x10GbE SFP+ ports, 70,000 SSL TPS 2K Keys, 2U)
APV10650	
AWg60060	APV10650 AppVelocity Dual Power Supplies ADC (SLB, LLB, 8x10GbE SFP+ ports, 2U)

Ordering No.	Description
AWg60061	APV10650 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 8x10GbE SFP+ ports, 70,000 SSL TPS 2K Keys, 2U)
AWg79007	APV10650 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 8x1GbE copper ports, 4x10GbE SFP+ ports, 70,000 SSL TPS 2K Keys, 2U)
AWg60062	APV10650 AppVelocity Dual Power Supplies (SLB, LLB, 16x10GbE SFP+ ports, 2U)
AWg60063	APV10650 AppVelocity-S Dual Power Supplies (SLB, LLB, 16x10GbE SFP+ ports, 70,000 SSL TPS 2K Keys, 2U)
APV11600	
AWg77990	APV11600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 8x10GbE SFP+ ports, 2U)
AWg77991	APV11600 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 8x10GbE SFP+ ports, 70,000 SSL TPS 2K Keys, 2U)
AWg77992	APV11600 AppVelocity Dual Power Supplies ADC (SLB, LLB, 16x10GbE SFP+ ports, 2U)
AWg77993	APV11600 AppVelocity-S Dual Power Supplies ADC (SLB, LLB, 16x10GbE SFP+ ports, 70,000 SSL TPS 2K Keys, 2U)
APV 2U Appliances: Feature Options	
AWg20560	APV5600/6600/7600/10650/11600 TM8.x Feature Option: Global Server Load Balancing License
AUg20641	Hardware Compression license option for AppVelocity-S models APV5600/6600/7600/10650/11600
Factory Options	
AWg10277	Factory Only: SSD option for APV x600 Series.
Other Hardware Options	
AW300052	USB Fast Failover Cable for APV1600/2600/5600/6600/7600/10650/11600
AR400027	Power Supply Module: 350W, 1U (100-240V, 8-4A, 63-47Hz)
AR400023	Power Supply Module: 450W, 1U (100-240V, 8-4A, 63-47Hz)
AR400024	Power Supply Module: 800W, 2U (100-240V, 10-5, 50-60Hz)
AR400019	Power Supply Module: 275W, 1U (100-240V, 4-2A, 63-47Hz)
AR400018	Power Supply Module: 620W, 2U (100-240V, 10, 63-47Hz)
AWg69001	C14 to C13 200V System Power Cord (Japan only)
SFP Optical Transceivers	
AW220230	APV Field Upgrade: SX SFP Fiber Optical Transceiver (1G-Multi Mode 550M / LC / 850nm)
AW220231	APV Field Upgrade: LX SFP Fiber Optical Transceiver (1G-Multi Mode 2KM / LC / 1310nm)
AW220232	APV Field Upgrade: 1000Base-T SFP Copper Optical Transceiver (RJ45)



1371 McCarthy Blvd. Milpitas, CA 95035 | Phone: (408) 240-8700 Toll Free: 1-866-MY-ARRAY | www.arraynetworks.com

VERSION: MAY-2017-REV-A