

RX-series: RX300

Cloudfähiger Thin Client für Windows® und Linux®

Compatibility

- **vSpace Pro:** Refer to the [vSpace OS compatibility matrix](#) for the latest supported versions.
- **Verde VDI**
- **Microsoft RDS**

RX300 Features

- Full-motion HD video playback (1920 x 1200) via HDMI
- Transparent USB redirection
- Built-in 10/100 Ethernet and WiFi (802.11 b/g/n) with Personal and Enterprise 802.1x security
- Bluetooth 4.1 in Raspbian Linux mode
- Provisioned access to Raspbian Linux OS
- 8GB internal Micro SD card
- 1GB RAM
- Less than 5W power consumption
- Power button and sleep mode for additional power savings
- NComputing vCAST support
- RDP with RemoteFX support for improved session performance
- Kensington security port and VESA mount kit included

Optional Accessories

- **SDA** - Secondary display adapter (USB to VGA, DVI or HDMI)

The RX300 is a cloud-ready thin client built for productivity on the Raspberry Pi 3 platform, providing a rich PC-like experience featuring full-screen, full-motion HD multimedia playback, WiFi and ethernet connectivity, built-in transparent USB redirection with broad peripheral support, and optional access to Raspbian Linux OS managed by the IT admin.

The RX300 provides a simple-to-deploy, centrally managed, high performance virtual desktop, perfect for use in SMB and education which can be deployed on **vSpace Pro**, **VERDE VDI**, and **Microsoft RDS** systems.

vCAST Streaming and Microsoft RemoteFX

NComputing vCAST Streaming reduces server-side CPU usage for streaming media like YouTube as well as local media content without the need for expensive GPUs.

By utilizing network bandwidth instead of the server CPU, vCAST provides for better media streaming and allows for more concurrent users per server.

Enabling the RemoteFX feature in Microsoft RDS and VERDE VDI for Remote Desktop connections greatly enhances the user's visual experience. Host systems equipped with supported graphic cards will benefit.



Dual Mode-Unterstützung - verbesserte Produktivität und Flexibilität

Der RX300 ist sowohl mit einem "Thin Client Mode" als auch mit einem "Raspbian Linux Mode" ausgestattet. Verwenden Sie den RX300 als gesperrten Thin Client mit Verbindungen zu **vSpace Pro** und **Verde VDI** oder als Raspberry Pi 3-Gerät. Damit erhalten Sie direkten Zugriff auf Raspbian Linux OS und seine beliebten Spiele (Minecraft), Code-Anwendungen (Scratch, Python und Java) und Produktivitätstools.

Zentrale Verwaltung und Express-Bereitstellung


Der RX300 ist einfach zu konfigurieren und empfängt automatisch Updates von bereitgestellten **vSpace Pro**-Servern. Administratoren können eine Gerätevorlage mit allen Einstellungen und Konfigurationen definieren, diese dann klonen und auf neue Geräte übertragen. Alle Geräte können vom IT-Administrator mit **vSpace Pro** zentral verwaltet und bereitgestellt werden, so dass Hunderte von RX300-Geräten mit nur wenigen Klicks gesteuert werden können. Benutzer sind immer auf dem neuesten Stand der Technik.

Lizenzierung

RX300 comes with a perpetual software connection license for **vSpace Pro**. Microsoft RDS requires corresponding multi-user licenses from Microsoft. VERDE VDI requires separate connection licenses.

Server

Thin Clients

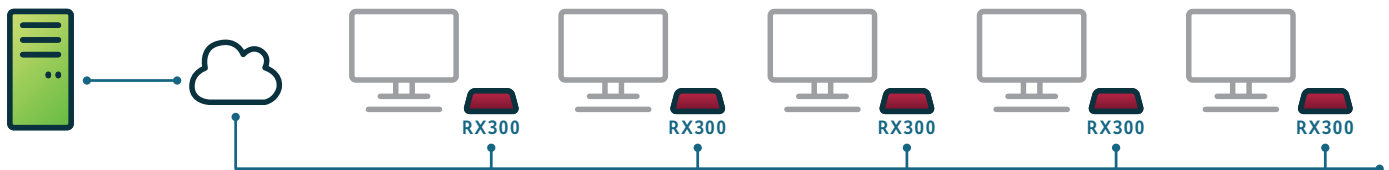



Device Management

For vSpace Pro

- vSpace Console is included
- [PMC](#) is available for subscribers to [AMP for vSpace Pro](#)

For VERDE VDI

- [PMC](#) is included

For Microsoft RDS

- [PMC](#) requires separate licenses.

RX300 Connections

1. Power in (5.1V micro USB)
2. HDMI video output
3. Speaker jack: 16bit/44kHz/Stereo high quality audio
4. 10/100 Mbps Ethernet RJ45 port
5. 4 High-Speed USB 2.0 ports with full USB redirection support (2 required for mouse and keyboard)
6. Kensington security port
7. Power on/off and sleep mode button disables display output for power savings

HARDWARE	DESCRIPTION
BOX CONTENTS	Each RX300 includes 1 device, 1 power supply, VESA mount kit and a Quick Installation Guide.
SIZE	Width: 76 mm / 3 inches, Depth: 93 mm / 3.7 inches, Height : 30 mm /1.2 inches
WEIGHT	92g / 0.21 lbs. Shipping weight (includes power adapter, packaging, document): 0.31kg / 0.7 lbs
POWER SUPPLY	5.1VDC (2.5A) power supply included
POWER CONSUMPTION	5W max (independent of external USB devices)
LED INDICATORS	Power, network link, and network activity
DISPLAY	HDMI video output supporting resolutions up to 1920 x 1200 with DDC support. Secondary display via optional SDA (USB to VGA, DVI or HDMI)
SOC	Broadcom BCM2837, 1.2GHz 64bit Quad Core Cortex A53 Dual core VideoCore IV, Multimedia Processor
MEMORY	<ul style="list-style-type: none"> • Mass storage: 8 GB internal Micro SD card • RAM: 1GB
MONITOR POWER-SAVE	Power on/off and sleep mode button to disable display output for power savings
NETWORK AND CONNECTIVITY	<ul style="list-style-type: none"> • 10/100 Ethernet RJ45 port • Wi-Fi (2.4 GHz 802.11 b/g/n) • Bluetooth 4.1
AUDIO	16-bit/44kHz/Stereo high quality digital audio with support for USB2.0 audio devices or via 3.5mm stereo audio jacks for headphone
PERIPHERAL SUPPORT	4x USB 2.0 high-speed ports (two required for keyboard & mouse) <ul style="list-style-type: none"> • All USB ports provide full USB redirection, utilizing device drivers from the server.
OPERATION MODE	Provisioned by IT admin: <ul style="list-style-type: none"> • Thin Client Mode (dedicated thin client) • Raspbian Linux Mode (access to underlying Raspbian OS and built-in applications)
EMBEDDED OS	RX300 firmware based on Raspbian OS
HOST MACHINE CONFIG	See recommended hardware configuration guide at www.ncomputing.com/support
WARRANTY	1 year hardware warranty included; Optional extended hardware warranty available
MOUNT OPTIONS	VESA mount compatible (included)

SOFTWARE	DESCRIPTION
OPERATING SYSTEMS	Refer to the vSpace operating system compatibility matrix for the latest supported versions.
USER SOFTWARE	NComputing vSpace Pro and VERDE VDI software; built-in vSpace Console device management features to support RX300 thin clients. Optional PMC Device Management software (separate license required) to remotely manage RX300 devices.
LICENSING	RX300 comes with a perpetual software connection license to vSpace Pro desktop virtualization software. PMC Device Management software for remote device management is optional.
VCAST STREAMING	RX300 supports vCAST Streaming for web and media content. vCAST is included in vSpace Pro and VERDE VDI. vCAST on Microsoft RDS requires a license for the NComputing SuperRDP server pack.
DUAL SCREEN DISPLAY	Support for secondary display via optional NComputing SDA; currently supported in UXP protocol and will expand to RDP protocol in Q4, 2018
SUPPORTED PLATFORMS	vSpace Pro, VERDE VDI, Microsoft RDS

RX-series products are RoHS compliant and have been EMI certified according to FCC, CE, BIS and KC standards.



Need more info?
We'd love to talk to you about your project. [Click here.](#)