

698-960/1710-2700 MHZ 3/5 DBI FLUSH CEILING MOUNT OMNI ANTENNA WITH N-STYLE ATS-OO-DAS-35-1NP-8



## **ELECTRICAL SPECIFICATIONS**

Frequency Range: 698-960 / 1710-3800 MHz Gain: 3/5 dBi Polarization: Vertical Impedance: 50 Ω VSWR: ≤2.0 Max Input Power: 50 W





## **MECHANICAL SPECIFICATIONS**

Dimensions: 8.4"x 1.77" (213x45mm) Weight: 1.76 lb (0.8 kg) Installation: Nut plate to ceiling Radome Material: ABS Connector: N-Style Lead length: 7.87" (20 cm.)




## **ENVIRONMENTAL SPECIFICATIONS**

Installation Environment: Indoor

## WARRANTY

2 Year Limited Warranty

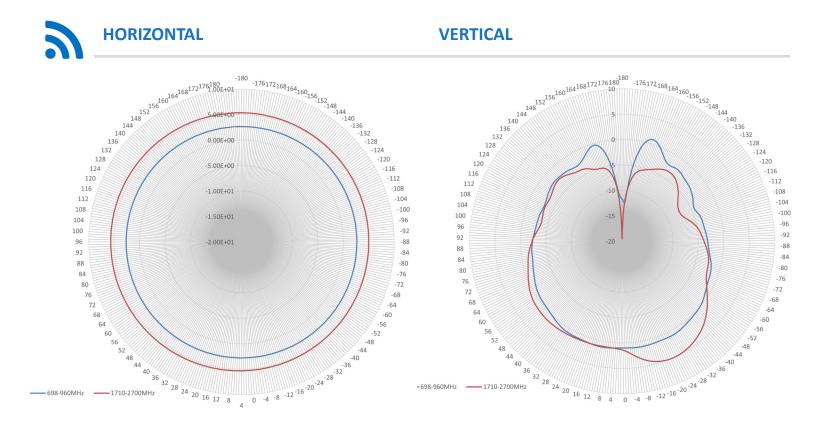

The facts and figures herein are carefully compiled to the best of our knowledge and are intended for general informational purposes only. Responsibility for the use and application of AccelTex Solutions materials rests with the end user. All AccelTex Solutions products are sold pursuant to the AccelTex Solutions Terms and Conditions of Sale. © 2021 AccelTex Solutions. All Rights Reserved. AccelTex, AccelTex Solutions, the AccelTex Solutions Logo and other marks are trademarks or registered trademarks of AccelTex Solutions. Other products or service names may be the property of third parties.

1.888.406.8906 SALES@ACCELTEX.COM